Eagle 332DL Wired Cabinet

DATA SHEET



DESCRIPTION

The Eagle model 332DL double-wide cabinet assembly and auxiliary equipment meets CalTrans specifications per the 2009 TEES. The cabinet assembly measures 67“ high x 48“ wide and a depth of 30“.


The 332DL cabinet assembly provides control for up to eight vehicle phases and four pedestrian phases, and six additional phases can be added using the optional auxiliary output file. Four doors enable access from either side to provide easy maintenance. All surfaces are bare, unpainted aluminum. Anodizing or powder coating is available per request. A police door with a Signal On/Off switch and a Flash/Auto switch is included with each cabinet. Each cabinet can also include options such as cabinet light(s), door alarm, detector test panel, red monitoring board and more.

STANDARD FEATURES

- 36 detector channel capability
- 2 or 4 channel detector modules
- 2 R/R Preemption input (AC isolation)
- 4 emergency vehicle inputs (input file slots 10 &11)
- DC isolation inputs for pedestrian push buttons and special functions
- High-efficiency, switching power supply
- Programmable yellow/red or all red flash through the use of color-coded flash plugs
- 2 dual circuit flasher positions
- Solid state relay for flash control
- Pull out drawer/shelf
- Surge suppressor/ Line filter and 30A main circuit breaker mounted on service panel assembly (SPA) for incoming power
- Thermostatically controlled ventilation system with (1) 100 CFM fan per rack

Made In The USA - BABA Compliant

EAGLE®
Traffic Control Systems

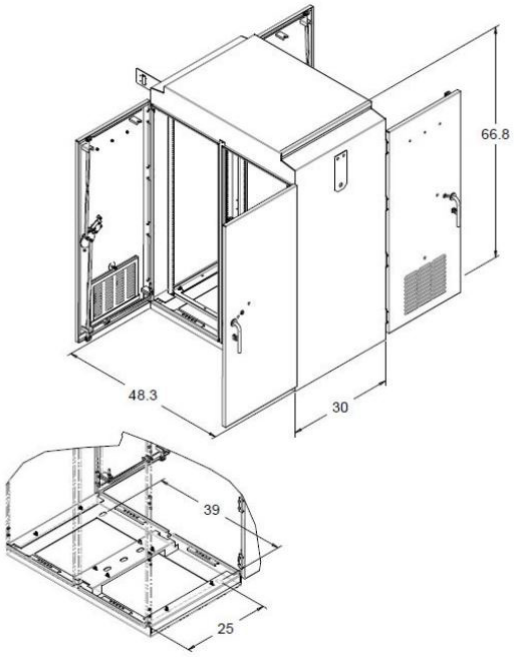

DIMENSIONS

67” H x 48” W x 30” D

STANDARD ENCLOSURE SPECIFICATIONS

Completely fabricated from 1/8” thick type 5052-H32 vinyl-coated, mill-finished aluminum utilizing continuously welded construction.

Door openings double flanged on all sides.

Exhaust outlet openings provided under roof.

All internal and external hardware utilizes non-corrosive material.

Automatic door stop can be latched at 90° and 180° positions.

Furnished with (2) internal E.I.A. 19” racks for mounting equipment.

COMMON OPTIONAL FEATURES

Auxiliary output file provides 6 additional switch positions for overlaps, and additional ped phases.

Cabinet lights – LED or fluorescent.

Detector and preempt test switch panel.

Red monitoring kit.

Manual control cable located in police panel.

Generator compartment to connect emergency power.

Alternate locks available.

Special configurations available on request.

STANDARD DOOR SPECIFICATIONS

Provided with three-point locking mechanism with duplex nylon rollers, top and bottom.

3/4” diameter stainless steel inward-turning handles with provisions for padlocking.

Main door lock – industrial standard pin tumbler lock with #2 key.

Louvered inlet with filter to prevent dirt from entering with air flow.

Closed-cell neoprene door seal gasket.

Stainless steel leave hinges with .190” diameter stainless steel hinge pins. Pin ends are welded to the hinge and ground smooth.

Hinge pins and bolts are covered by the door edge and not accessible when the door is closed.

A fabricated switch compartment is included with a standard police lock and a stainless steel continuous hinge with a 1/8” diameter hinge pin carriage bolted in place. Compartment mounted flush to the side wall.

ORDERING INFORMATION

ELS3322D – Cabinet with Racks

JBS2332LTCA01 – Terminal Facility – Caltrans Standard